

### Specifications

Model	Z-34/22N DC	
Measurements	US	Metric
Working height maximum*	40 ft 6 in	12.52 m
Platform height maximum	34 ft 6 in	10.52 m
Horizontal reach maximum	22 ft 3 in	6.78 m
Up and over clearance maximum	15 ft 3 in	4.65 m
<b>A</b> Platform length	2 ft 6 in	0.76 m
<b>B</b> Platform width	4 ft 8 in	1.42 m
<b>C</b> Height - stowed	6 ft 7 in	2.00 m
<b>D</b> Length - stowed	18 ft 9 in	5.72 m
<b>E</b> Storage height	7 ft 5 in	2.26 m
<b>A</b> Storage length	13 ft 9 in	4.19 m
<b>A</b> Width	4 ft 10 in	1.47 m
<b>A</b> Wheelbase	6 ft 2 in	1.88 m
<b>A</b> Ground clearance - center	5.5 in	0.14 m

### Productivity

Lift capacity	500 lb	227 kg
Platform rotation	180°	
Vertical jib rotation	139°	
Turntable rotation	355° non-continuous	
Turntable tailswing	zero	
Drive speed - stowed	4.0 mph	6.4 km/h
Drive speed - raised**	0.68 mph	1.1 km/h
Gradeability - stowed***	35%	
Turning radius - inside	7 ft	2.13 m
Turning radius - outside	13 ft 5 in	4.08 m
Controls	24V DC proportional / 2 speed	
Tires (solid rubber, non-marking, treaded)	22 x 7 x 17.75 in	.56 x .18 x .45 m

### Power


Power source	48V DC (eight 6 V batteries 315 Ah capacity)	
Auxiliary power unit	24V DC	
Hydraulic tank capacity	4 gal	15.1 L

### Weight\*\*\*\*


	11,400 lb	5,171 kg
--	-----------	----------

### Standards Compliance

ANSI A92.5, CSA B354.4, EN 280, AS 1418.10

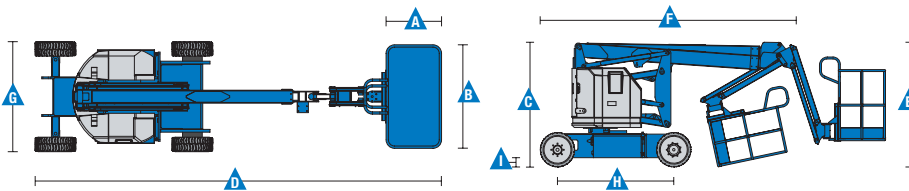

### Range Of Motion Z-34/22N

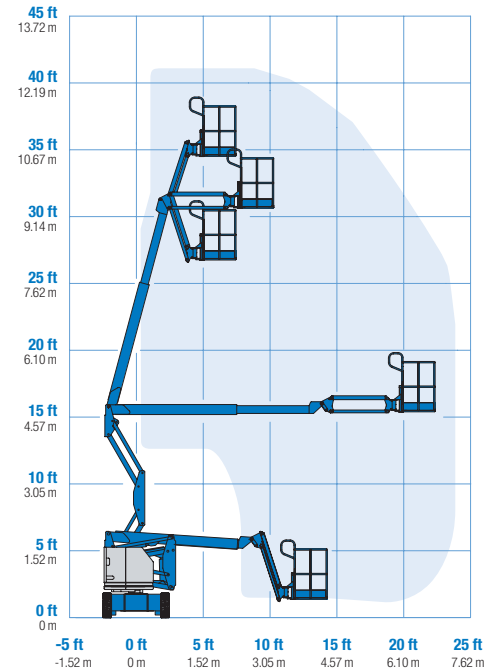

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* In lift mode (platform raised), the machine is designed to operate on firm, level surfaces only.

\*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.

**TOTAL**  
**WAREHOUSE**

www.totalwarehouse.com

833-868-2500

### Features

#### Standard Features

##### Measurements

- 40 ft 6 in (12.52 m) working height
- 22 ft 3 in (6.78 m) horizontal reach
- 15 ft 3 in (4.65 m) up and over clearance
- Up to 500 lb (227 kg) lift capacity

##### Productivity

- 4 ft (1.22 m) jib boom with 139° working range
- Self-leveling platform
- Hydraulic platform rotation
- Proportional joystick controls
- Thumb rocker steer
- Drive enable
- AC power cord to platform
- Alarm package: flashing beacon and travel alarm
- Horn
- Hour meter
- Tilt alarm
- Descent alarm
- Zero tailswing
- 355° non-continuous turntable rotation
- Lift Guard™ Contact Alarm
- Dual parallelogram for vertical wall tracking

##### Power

- 48V deep cycle battery pack
- 24V DC auxiliary power
- Universal 30A battery smart charger

#### Easily Configured To Meet Your Needs

##### Platform Options

- Steel 4 ft 8 in (1.42 m) with sliding mid-rail (standard)
- Steel 3 ft 10 in (1.17 m) with sliding mid-rail

##### Jib

- 4 ft (1.22 m) jib boom

##### Power

- 48V DC power source

##### Drive

- 2WD

##### Tire

- Solid rubber non-marking

#### Options & Accessories

##### Productivity

- Platform swing gate
- Lift Guard Platform Mesh - Half
- Lift Guard Platform Mesh - Full
- Platform top auxiliary rail\*\*\*
- Air line to platform
- Specialty hydraulic oil (cold weather, fire resistant or biodegradable)
- Aircraft protection package\*
- Hostile environment kit
- Fluorescent tube caddy\*\*
- Pipe cradle (pair)\*\*
- Light package
- Lockable platform control box cover

##### Power

- AGM batteries
- EE UL583 Fire Protection rating
- Battery charge indicator (BCI)
- Low voltage interrupt with BCI
- 800 watt 120VAC power inverter



\* Reduces platform weight capacity to 440 lb  
 \*\* Available through aftermarket parts only  
 \*\*\* Not available with swing gate or 1/2 height mesh

**TOTAL**  
**WAREHOUSE**

[www.totalwarehouse.com](http://www.totalwarehouse.com)

833-868-2500