

Type	Model	Max. fork height	Overall height			Free lift			Front Overhang			Tilt range		Capacity					
			Lowered	Extended		Without backrest	With backrest	Without backrest	With backrest	1 / 1.5	1.75t	FWD	BWD	Load capacity at 500mm					
				mm	mm									Single tire			Dual tire		
														1t	1.5t	1.75t	1t	1.5t	1.75t
Wide view mast																			
	X15M200	1485	2000	1745	2065	2455	155	155	405	410	6	12	1000	1500	1750	1000	1500	1750	
	X15M250	2500	1745	2065	3455	155	155	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15M270	2700	1845	3265	3655	155	155	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15M300	3000	1995	3565	3955	155	155	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15M330	3300	2145	3865	4255	155	155	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15M360	3500	2245	4065	4455	155	155	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15M370	3700	2395	4265	4655	155	155	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15M400	4000	2595	4600	4955	155	155	405	410	6	12	1000	1500	1650	1000	1500	1700		
	X15M430	4300	2745	4900	5255	155	155	405	410	6	6	850	1450	1600	900	1350	1500		
	X15M450	4500	2845	5100	5455	155	155	405	410	6	6	900	1400	1550	950	1400	1600		
	X15M470	4700	2945	5300	5655	155	155	405	410	6	6	850	1350	1500	900	1350	1550		
	X15M500	5000	3095	5600	5955	155	155	405	410	6	6	800	1300	1450	850	1300	1500		
	X15M550	5500	3345	6100	6455	155	155	405	410	6	6	/	/	/	750	1150	1300		
	X15M600	6000	3595	6600	6955	155	155	405	410	6	6	/	/	/	700	1050	1150		
	X15U200	2000	1560	2585	2945	975	615	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15U250	2500	1810	3085	3445	1225	865	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15U270	2700	1910	3285	3645	1325	965	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15U300	3000	2010	3485	3845	1375	1065	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15U330	3300	2160	3885	4245	1575	1215	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15U350	3500	2260	4085	4445	1675	1315	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15U370	3700	2360	4285	4645	1775	1415	405	410	6	12	1000	1500	1750	1000	1500	1750		
	X15U400	4000	2560	4685	5045	1915	1615	405	410	6	12	1000	1500	1650	1000	1500	1700		
	X15M400	4000	1970	4680	4995	1300	1025	420	425	6	6	900	1400	1550	950	1400	1600		
	X15M430	4300	2070	4980	5295	1400	1125	420	425	6	6	850	1350	1500	900	1350	1550		
	X15M450	4500	2120																

2.0~2.5t XF series mast: (pneumatic)


Type	Model	Max. fork height	Overall height				Free lift		Front Overhang	Tilt range		Capacity						
			Lowered	Extended		Without backrest	With backrest	Without backrest		With backrest	Fwd	Bwd	Load capacity at 500 mm					
				Single tire	Dual tire													
					2.0t								2.5t	2.0t	2.5t			
mm	mm	mm	mm	mm	mm	mm	mm	(°)	(°)	kg	kg	kg	kg	kg	kg			
Wide view mast	X25M200	2000	1575	2560	3045	140	140	465	6	12	2000	2500	2000	2500	2000	2500		
	X25M250	2500	1725	3160	3545	140	140	465	6	12	2000	2500	2000	2500	2000	2500		
	X25M270	2700	1885	3360	3745	140	140	465	6	12	2000	2500	2000	2500	2000	2500		
	X25M300	3000	2035	3560	4045	140	140	465	6	12	2000	2500	2000	2500	2000	2500		
	X25M330	3300	2185	3960	4345	140	140	465	6	12	2000	2500	2000	2500	2000	2500		
	X25M350	3500	2285	4160	4545	140	140	465	6	12	2000	2500	2000	2500	2000	2500		
	X25M370	3700	2435	4360	4745	140	140	465	6	12	2000	2500	2000	2500	2000	2500		
	X25M400	4000	2635	4660	5045	140	140	465	6	12	2000	2500	2000	2500	2000	2500		
	X25M430	4300	2785	4860	5345	140	140	465	6	6	1950	2300	2000	2450	2000	2450		
	X25M450	4500	2855	5160	5545	140	140	465	6	6	1900	2150	1500	2000	1500	2000		
Wide view duplex mast	X25M480	4800	2985	5360	5745	140	140	465	6	6	1850	1850	1300	2000	1300	2150		
	X25M500	5000	3135	5560	6045	140	140	465	6	6	1800	1850	1500	1850	1500	1900		
	X25M550	5500	3385	6160	6545	140	140	465	3	6	1700	1750	1600	1900	1600	1900		
	X25M600	6000	3635	6660	7045	140	140	465	3	6	1600	1700	1500	1850	1400	1750		
	X25U200	2000	1560	2580	3045	880	510	465	6	12	2000	2500	2000	2500	2000	2500		
	X25U250	2500	1810	3180	3545	1130	760	465	6	12	2000	2500	2000	2500	2000	2500		
	X25U300	3000	2060	3430	3745	1280	860	465	6	12	2000	2500	2000	2500	2000	2500		
	X25U320	3200	2010	3580	4045	1330	960	465	6	12	2000	2500	2000	2500	2000	2500		
	X25U330	3300	2160	3980	4345	1480	1110	465	6	12	2000	2500	2000	2500	2000	2500		
	X25U350	3500	2260	4180	4545	1580	1210	465	6	12	2000	2500	2000	2500	2000	2500		
Wide view triplex mast	X25U370	3700	2360	4380	4745	1680	1310	465	6	12	2000	2500	2000	2500	2000	2500		
	X25U400	4000	2560	4680	5045	1880	1510	465	6	12	2000	2500	2000	2500	2000	2500		
	X25N400	4000	2000	4700	5045	1300	955	480	6	6	1900	2350	1950	2500	2450	2450		
	X25N420	4200	2100	5000	5345	1355	1050	480	6	6	1850	2250	1900	2500	2400	2450		
	X25N450	4500	2150	5230	5595	1470	1105	480	6	6	1800	2050	1850	2500	2350	2400		
	X25N470	4700	2200	5380	5745	1520	1155	480	6	6	1750	1900	1800	2050	1950	2050		
	X25N500	5000	2200	5680	6045	1620	1255	480	6	6	1700	1750	1700	2250	2050	2250		
	X25N550	5500	2500	6180	6545	1820	1455	480	3	6	1300	1400	1600	1600	1500	1500		
	X25N600	6000	2750	6730	7095	2070	1705	480	3	6	900	1000	1400	1750	1400	1750		
	X25N650	6500	2900	7200	7560	2200	1855	480	3	6	1250	1350	1850	2250	1850	2250		
X25N700	7000	3050	7680	8045	2370	2005	480	3	6	1	1	1100	1100	1100	1150			

3.0~3.5t XF series mast: (pneumatic)

Type	Model	Max. fork height	Overall height						Free lift			Front Overhang (mm)	Tilt range		Capacity				
			Lowered (mm)	Extended		Without backrest (mm)	With backrest (mm)	Without backrest (mm)	With backrest (mm)	FwD	BwD		Load capacity at 500 mm						
				Single tire (kg)	Dual tire (kg)														
Wide view mast	X30/S3M200	2000	1500	3.5t	3.0t	3.5t	3.0t	3.5t	3.0t	3.5t	3.0t	3.5t	(*)	(*)	3.0t	3.5t	3.0t	3.5t	
	X30/S3M250	2500	1650	2735	2815	3145	3145	145	145	145	480	485	6	12	3000	3500	3000	3500	
	X30/S3M270	2700	1900	2015	3435	3515	3845	3845	145	145	145	480	485	6	12	3000	3500	3000	3500
	X30/S3M300	3000	2050	2165	3735	3815	4145	4145	145	145	145	480	485	6	12	3000	3500	3000	3500
	X30/S3M320	3200	2200	2315	4035	4115	4445	4445	145	145	145	480	485	6	12	3000	3500	3000	3500
	X30/S3M350	3500	2300	2415	4235	4315	4645	4645	145	145	145	480	485	6	12	3000	3500	3000	3500
	X30/S3M370	3700	2450	2565	4435	4515	4845	4845	145	145	145	480	485	6	12	3000	3500	3000	3500
	X30/S3M400	4000	2650	2715	4615	4615	5145	5145	145	145	145	480	485	6	12	3000	3500	3000	3450
	X30/S3M430	4300	2850	2935	5035	5115	5480	5480	145	145	145	480	485	6	12	2850	3400	3000	3450
	X30/S3M450	4500	2900	2965	5235	5315	5645	5645	145	145	145	480	485	6	12	2700	3150	2850	3150
Wide view mast with free dualist mast	X30/S3M470	4700	3000	3065	5435	5515	5840	5845	145	145	145	480	485	6	12	2550	3000	2700	3000
	X30/S3M510	5100	3200	3215	5715	5815	6145	6145	145	145	145	480	485	6	12	2400	2850	2550	2850
	X30/S3M550	5500	3400	3465	6235	6315	6645	6645	145	145	145	480	485	3	6	/	/	2400	2650
	X30/S3M600	6000	3650	3715	6735	6815	7145	7145	145	145	145	480	485	3	6	/	/	2200	2400
	X30/S3M620	6200	3700	3720	6935	7035	7345	7345	145	145	145	480	485	3	6	/	/	2000	2200
	X30/S3M650	6500	3800	3815	7135	7235	7545	7545	145	145	145	480	485	3	6	/	/	1900	2100
	X30/S3M700	7000	4000	4015	7435	7535	7845	7845	145	145	145	480	485	3	6	/	/	1700	1900
	X30/S3M720	7200	4100	4120	7635	7735	8045	8045	145	145	145	480	485	3	6	/	/	1600	1800
	X30/S3M750	7500	4200	4215	7835	7935	8245	8245	145	145	145	480	485	3	6	/	/	1500	1700
	X30/S3M800	8000	4400	4415	8135	8235	8545	8545	145	145	145	480	485	3	6	/	/	1400	1600
Wide view mast with free triple mast	X30/S3M850	8500	4600	4615	8435	8535	8845	8845	145	145	145	480	485	3	6	/	/	1300	1500
	X30/S3M900	9000	4800	4815	8635	8735	9045	9045	145	145	145	480	485	3	6	/	/	1200	1400
	X30/S3M950	9500	5000	5015	8835	8935	9245	9245	145	145	145	480	485	3	6	/	/	1100	1300
	X30/S3M1000	10000	5200	5215	9035	9135	9445	9445	145	145	145	480	485	3	6	/	/	1000	1200
	X30/S3M1050	10500	5400	5415	9235	9335	9645	9645	145	145	145	480	485	3	6	/	/	900	1100
	X30/S3M1100	11000	5600	5615	9435	9535	9845	9845	145	145	145	480	485	3	6	/	/	800	1000
	X30/S3M1150	11500	5800	5815	9635	9735	10045	10045	145	145	145	480	485	3	6	/	/	700	900
	X30/S3M1200	12000	6000	6015	9835	9935	10245	10245	145	145	145	480	485	3	6	/	/	600	800
	X30/S3M1250	12500	6200	6215	10035	10135	10445	10445	145	145	145	480	485	3	6	/	/	500	700
	X30/S3M1300	13000	6400	6415	10235	10335	10645	10645	145	145	145	480	485	3	6	/	/	400	600



TOTAL
WAREHOUSE
www.totalwarehouse.com
833-868-2500



with capacities of 1,000 to 3,500kg



The World of Hangcha

www.totalwarehouse.com

833-868-2500

Simple/ Solid/ Smart


In the new XF Series, Hangcha brought together the experience of more than 30 years building forklifts and the latest forklift technologies, the result is superior in efficiency, environmental friendliness, comfortable operation, reliability, safety. The XF Series, produced from careful research and development, represent a true solution to needs from environment, operator and owner.



Productivity

Dynamic load sensing hydraulic steering system, Efficiency lighting system, lower fuel consumption, combine to provide increased productivity and reduced operating costs.


The new Dynamic load sensing hydraulic steering system contributes to reduce loss of hydraulic and improve energy efficiency.

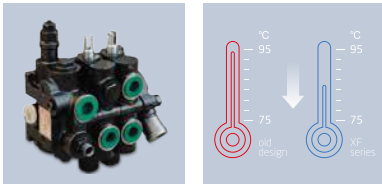

The new efficiency lighting system employs LED illuminant and new type reflector to reduce energy consumption, improve significantly illumination performance and prolong work time.



By optimizing transmission design, the power train provides higher efficiency. The fuel consumption is reduced by 10%.

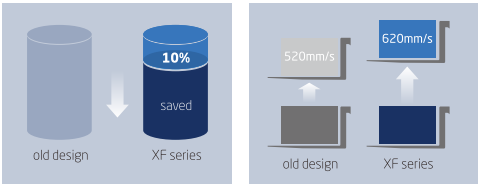

Environmental Friendliness

A lineup of powerful and clean engines and environment friendly materials help to reduce the output of undesirable substances over the lifetime of the truck, while creating a cleaner work environment.



Each model employs a specially developed engine for the optimum balance of power and superior environmental performance. All engines are in compliance with EU stage-III control regulation.

The environment friendly materials, such as nonasbestos brake shoe and new type sealing gasket, are adopted entirely to pursue environmental safety.

Comfortable Operation



In developing the new XF Series, comfort and ease of operation is carefully considered, for example, to improve vibration levels, compound engine damper and full floating power train are adopted. Comfortable operating environments for operator also contribute to increased productivity.



In addition to rubber damper between frames and steering axle, compound engine damper and full floating power train achieve flexible connection between frames and driving system, as a result, traveling vibrations and vibrations from the driving system are significantly reduced.



The enlarged capacity of optimized exhaust muffler, the intake muffler and the noise shield technologies provide significantly lower noise levels.

1. The new, relocated easy- to-see LCD meter lets the operator check on all aspects of operational status at a glance.
2. The new automobile-style light/turn-signal lever and forward-reverse lever are ergonomically designed and arranged to improve comfort and productivity.
3. The small diameter steering wheel with tilt adjustment provides the ideal operating position. The superior responsiveness of the steering wheel optimizes maneuverability even in narrow spaces.
4. The parking brake is specially developed. The operational force is reduced by 30%.
5. The automobile-style suspended pedals provide more ergonomic operation.




Comfortable Operation

Optimal visibility in all directions create the best conditions for high productivity through relaxed and safe working.




The extra foot space is provided to reduce operator fatigue significantly. The new wide-open, non-slip step makes getting in and out easy and safe.

The optional Electro-hydraulic proportional control system contributes more sensitive and precise load handling. The easy- to-operate levers provide total load handling operation. An armrest is provided to reduce fatigue.

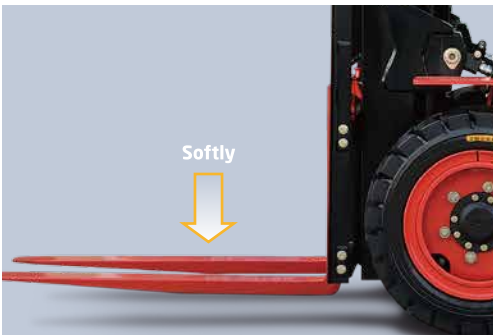

In addition to the soft landing system, the soft lifting system is adopted (front lifting cylinders of triplex mast and full free duplex mast), as a result, the noise and shock of the mast significantly decreases.

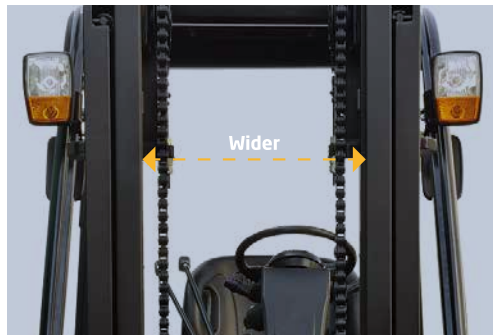

The developed front lifting cylinders with smaller outer diameter give the operator superior forward visibility.

The double lifting cylinders provide better forward visibility.



Reliability

By focusing on enhancing reliability, reducing downtime, the XF series is able to make the greater productivity for customer.



The new aluminum alloy transmission with full floating structure features excellent heat dissipation capability, more and thicker disc meet the most demanding applications.



The new vehicle controller integrates all electrical components, features excellent durability for temperature, water and vibration for most demanding operation.



The new stamped air cleaner featuring tangential intake, double seal with safety filter is durable, corrosion-free and vibration-resistant, provides better filter efficiency and lower intake resistance than the previous.



XF series features rugged design, stamped frame and engine hood, stamped instrument panel and head guard, heavy profile rail mast combine to provide excellent rigidity, which ensures outstanding reliability even in heavy-duty work.



Extra capacity combined radiator with serpentine wave and optimized heat dissipation channel enhance the heat dissipation capability to keep engine reliability even in heavy-duty applications.

Easy Maintenance



Careful design facilitates inspection and servicing. Easy maintenance reduces the amount of downtime and helps to reduce cost also.

The cover on the Panel can be lifted up simply to check the brake fluid.

The two-piece design makes the floorboard easy to lift and remove for access to the power train.

The easy-to-operate latch provides quick access to the engine compartment.

The fasteners of the radiator cover can be turned easily by hand to enable quick inspections or servicing.

Safety

A wide range of technologies are applied to ensure absolute safety for both the operator and those in the surrounding.



The locking device of the engine hood damper and parking brake help add to safety.



An optional rear-pillar assist grip with a horn button enhances safety of operator while traveling in reverse.



- 1. The operator presence sensing system incorporates lifting/tilting and traveling locking function. When the operator leaves the seat, the system automatically locks lifting / tilting and disables traveling to ensure safety.
- 2. A throttling device is adopted to avoid the mast being out of control even some pipes are broken.

Standards

Transmission	Steering	Chassiss	Control	Hydraulic
/ Suspended transmission / Oil filter / Dipstick / Oil cooler / Non-asbesttos brake	/ Full hydraulic power steering / Smaller diameter steering wheel / Adjuster of steering wheel	/ Skidproof pedal / Rubber pedal / Engine hood spring	/ Power steering / Suspension pedal / Integrated combination switch / Cable parking brake	/ Dynamic load sending control valve (Diesel IC) / Hydraulic oil filter / Tilt cylender self-locking valve / Hydraulic oil dipstick

Truck	Power	Electronics	Mast
/ Traction device / Handhilds / Standard seat / Standard overhead guard / Waterproof cover on the guard / Back view mirror / Pneumatic tyres / Toolbox	/ Big capacity aluminum radiator / Little tank / Whirlwind air cleaner / Safety filter / High-efficient intake muffler / High-efficient exhaust muffler	/ High-efficient front lights / High-efficient LED rear lights / Service-free start battery / Combination controller / LCD display / Neutual switch / Timee meter / Fuel gauge / Water temperature gauge / Pre-heat indicator / Charging indicator / Engine fuel pressure warning / Transmission oil pressure warning / Horn / Reversing uzzer / Power off	/ Standard wide view duplex mast / Standard forks / Standard fork carriage / Standard load back rest / Mast speed limiting valve / Load safety valve / Mast down buffer device / Mast up buffer device / Side roller

Options

Truck	Transmission	Power	Hydraulic	Electronics	Mast
/ Cabin / Cabin heater / Front window / Super elastic tyre / No-mark tyre (white/green) / Suspension seat / Extinguisher / Cover of tilt cylender / Heightening overhead guard / Reversing assist grip / Special given color / Seat with sensing system / Boot for tilt cylinder / Counter weight net	/ 2-D wheel / Wlet brake system	/ Duel fuel LPG system / Big capacity copper radiator / High-positioned exhaust system / Middle-positioned exhaust system / Air pre-cleaner / Net cover of radiator / Sparkle arrester / Purified exhaust system / Swiwel LPG bottle support / Downward LPG bottle support / Fan protector	/ Auxiliary hydraulic valve / Electro-hydraulic proportional control system / Return oil filter	/ OBD / Front working light / Rear working light / Warning lamp / Oil-water seperator warning	/ Duplex wide view free-lift mast / Triplex wide view free-lift mast / Triplex wide view 4-cylinder free-lift mast / Special forks / Wider fork carriage / Wider load back rest

Optional Attachments

- / Paper roll clamp
- / Rotating bale clamp
- / Load stabilizer
- / Multi-drum clamp
- / Bale clamp
- / Drum clamp
- / Dumping clamp
- / Crane arm
- / String Pole
- / Sideshifter
- / Rotating forks
- / Fork extensioner
- / Load release device
- / Carton clamp
- / Push-pull device
- / Bucket
- / Hook
- / Lengthened fork



XF series 1.0-1.8t forklift specification :

Distinguishing mark	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.																
	1.2	Manufacturer's type designation		CPCD10-XW32F/B/M	CPQD10-XW21F/B/M	CPCD10-XW10F	CPCD15-XW32F/B/M	CPYD15-XW51F/B/M	CPQD15-XW21F/B/M	CPYD15-XW21F/B/M	CPQYD15-XW21F/B/M	CPCD15-XW10F	CPCD18-XW32F/B/M	CPYD18-XW51F/B/M	CPQD18-XW21F/B/M	CPYD18-XW21F/B/M	CPQYD18-XW21F/B/M	CPCD18-XW10F		
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Diesel	Gasoline	Diesel	Diesel	LPG	Gasoline	LPG	DUAL FUEL	Diesel	Diesel	LPG	Gasoline	LPG	DUAL FUEL	Diesel		
	1.5	Rated capacity/rated load	Q (kg)	1000			1500						1750							
	1.6	Load centre distance	c (mm)	500			500						500							
	1.8	Load distance, centre of drive axle to fork	x (mm)	405			405						405							
		Rear overhang	mm	375			405						430							
	1.9	Wheelbase	y (mm)	1475			1475						1475							
Weight	2.1	Service Weight	kg	2510			2650						2760							
	2.2	Axle loading, laden front/rear	kg	3055/455			3660/490						3995/520							
	2.3	Axle loading, unladen front/rear	kg	1260/1250			1240/1410						1225/1540							
Tyres, chassis	3.2	Tyre size, front		6.50-10-10PR			6.50-10-10PR						6.50-10-10PR							
	3.3	Tyre size, rear		5.00-8-10PR			5.00-8-10PR						5.00-8-10PR							
	3.6	Tread, front	b ₁₀ (mm)	900			900						900							
	3.7	Tread, rear	b ₁₁ (mm)	920			920						920							
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)	6/12			6/12						6/12							
	4.2	Height, mast lowered	h ₁ (mm)	1995			1995						1995							
	4.3	Free lift	h ₂ (mm)	155			155						155							
	4.4	Lift	h ₃ (mm)	3000			3000						3000							
	4.5	Height, mast extended	h ₄ (mm)	3955			3955						3955							
	4.7	Height of overhead guard (cabin)	h ₆ (mm)	2125(2205*)			2125(2205*)						2125(2205*)							
	4.20	Length to face of forks	l ₂ (mm)	2255			2285						2310							
	4.21	Overall width	b ₁ (mm)	1080			1080						1080							
	4.22	Fork dimensions	s/e/l (mm)	920×100×35			920×100×35						920×100×35							
	4.31	Ground clearance, laden, below mast	m ₁ (mm)	115			115						115							
	4.32	Ground clearance, centre of wheelbase	m ₂ (mm)	140			140						140							
	4.35	Turning radius	W _a (mm)	1965			1990						2015							
		Min. right angle stacking aisle width (Add load length and clearance)	mm	2370			2395						2420							
Performance data	5.1	Travel speed, laden/unladen	km/h	(-/19)(-/19.3)(-/19)	(-/18)(-/18)(-/18)	-/19	(-/19)(-/19.3)(-/19)	(-/18)(-/18)(-/18)	(-/18)(-/18)(-/18)			-/19	(-/19)(-/19.3)(-/19)	(-/18)(-/18)(-/18)	(-/18)(-/18)(-/18)			-/19		
	5.2	Lift speed, laden/unladen	m/s	0.580/-	0.510/-	0.610/-	0.580/-	0.510/-	0.510/-			0.610/-	0.580/-	0.510/-	0.510/-			0.610/-		
	5.3	Lowering speed, laden/unladen	m/s	0.500/-	0.500/-	0.500/-	0.500/-	0.500/-	0.500/-			0.500/-	0.500/-	0.500/-	0.500/-			0.500/-		
	5.5	Drawbar pull, laden/unladen	N	(14600/-)(14400/-) (14100/-)	(14800/-)(14500/-) (14300/-)	15500/-	(14600/-)(14400/-) (14100/-)	(14800/-)(14500/-) (14300/-)	(14800/-)(14600/-)(14300/-)			15500/-	(14600/-)(14400/-) (14100/-)	(14800/-)(14600/-) (14300/-)	(14800/-)(14600/-)(14300/-)			15500/-		
	5.7	Gradeability, laden/unladen*	%	(40/-)(39/-)(38/-)	(41/-)(40/-)(39/-)	41/-	(33/-)(33/-)(32/-)	(34/-)(33/-)(33/-)	(34/-)(33/-)(33/-)			34/-	(30/-)(30/-)(29/-)	(31/-)(30/-)(30/-)	(31/-)(30/-)(30/-)			31/-		
Combustion-engine	7.1	Engine manufacturer/type		YANMAR/4TNE92	GCT(NISSAN)/K21	ISUZU C240PKJ-30	YANMAR/4TNE92	GCT(NISSAN)/K21LPG	GCT(NISSAN)/K21			ISUZU C240PKJ-30	YANMAR/4TNE92	GCT(NISSAN)/K21LPG	GCT(NISSAN)/K21			ISUZU C240PKJ-30		
		Emission STD		StageIIIA/Tier3		StageIIIA	StageIIA/Tier3					StageIIIA	StageIIIA/Tier3					StageIIIA		
	7.2	Engine power according to DIN ISO 1585	kw	32.8	31.5	35.4	32.8	29	31.5			35.4	32.8	29	31.5			35.4		
	7.3	Rated speed	min	2450	2300	2500	2450	2250	2300			2500	2450	2250	2300			2500		
	7.4	Number of cylinders/displacement	(-)/(cm ³)	4/2659	4/2065	4/2369	4/2659	4/2065	4/2065			4/2369	4/2659	4/2065	4/2065			4/2369		
	7.10	Battery voltage/nominal capacity	V/Ah	12/60	12/60	12/60	12/60	12/60	12/60			12/60	12/60	12/60	12/60			12/60		
		Rated torque	N·m/r/min	142/1600	144/1600	139.9/1800	142/1600	140/1600	144/1600			139.9/1800	142/1600	140/1600	144/1600			139.9/1800		
		Bore × stroke	mm	92x100	89x83	86x102	92x100	89x93	89x83			86x102	92x100	89x83	89x83			86x102		
		Transmissions Manufacturer		HANGCHA/OKAMURA/MS			HANGCHA	HANGCHA/OKAMURA/MS						HANGCHA	HANGCHA/OKAMURA/MS					HANGCHA
		Transmissions Type		Powershift																
		Stage FWD/RVS		1/1																
Addition data	10.1	Operating pressure for attachments	bar	145																
	10.4	Fuel tank capacity	liter	50	50	50	50	28	50	28	50	50	50	28	50	28	50	50		

Note: *With suspension seat or cabin

* As a calculated value

XF series 2.0~2.5t forklift specification :

Distinguishing mark	1.1	HANGCHA GROUP CO.,LTD.																															
	1.2	CPCD20-XW33F/B/M	CPYD20-XW52F/B/M	CPQD20-XW22F/B/M	CPYD20-XW22F/B/M	CPQYD20-XW22F/B/M	CPCD20-XW32F	CPYD20-XW51F	CPQD20-XW21F	CPYD20-XW21F	CPQYD20-XW21F	CPCD20-XW43F/B	CPCD20-XW55F/B	CPCD20-XW56F/B/M	CPCD20-XW10F	PCPD25-XW33F/B/M	CPYD25-XW52F/B/M	CPQD25-XW22F/B/M	CPYD25-XW22F/B/M	CPQYD25-XW22F/B/M	CPCD25-XW32F	CPYD25-XW51F	CPQD25-XW21F	CPYD25-XW21F	CPQYD25-XW21F	CPCD25-XW43F/B	CPCD25-XW55F/B	CPCD25-XW56F/B/M	CPCD25-XW10F				
	1.3	Diesel	LPG	Gasoline	LPG	DUAL FUEL	Diesel	LPG	Gasoline	LPG	DUAL FUEL	Diesel	Diesel	Diesel	Diesel	Diesel	LPG	Gasoline	LPG	DUAL FUEL	Diesel	LPG	Gasoline	LPG	DUAL FUEL	Diesel	Diesel	Diesel	Diesel				
	1.5	2000														2500																	
	1.6	500														500																	
	1.8	465														465																	
		415														490																	
1.9	1650														1650																		
Weight	2.1	3405														3765																	
	2.2	4705/700														5475/790																	
	2.3	1610/1795														1560/2205																	
Tyres, chassis	3.2	7.00-12-12PR														7.00-12-12PR																	
	3.3	6.00-9-10PR														6.00-9-10PR																	
	3.6	965														965																	
	3.7	973														973																	
Dimensions	4.1	6/12														6/12																	
	4.2	2035														2035																	
	4.3	140														140																	
	4.4	3000														3000																	
	4.5	4045														4045																	
	4.7	2135(2215*)														2135(2215*)																	
	4.20	2530														2605																	
	4.21	1155														1155																	
	4.22	1070x122x40														1070×122×40																	
	4.31	115														115																	
	4.32	150														150																	
	4.35	2180														2245																	
		2645														2710																	
	Performance data	5.1	(-/18.2)(-/18.6) (-/17.9)	(-/19)(-/19.4) (-/18.7)	(-/19)(-/19.4)(-/18.7)			-/19.4	-/18.2	-/18.2		(-/18.2)(-/18.6)	(-/18.2)(-/18.6)	(-/17.5)(-/18)	-/19.7	(-/18.2)(-/18.6) (17.9)	(-/19)(-/19.4) (-/18.7)	(-/19)(-/19.4)(-/18.7)			-/19.4	-/18.2	-/18.2		(-/18.2)(-/18.6)	(-/18.2)(-/18.6)	(-/17.5)(-/18)	-/19.7					
5.2		0.620/-	0.560/-	0.560/-			0.600/-	0.490/-	0.490/-		0.620/-	0.620/-	0.620/-	0.590/-	0.620/-	0.560/-	0.560/-			0.600/-	0.490/-	0.490/-		0.620/-	0.620/-	0.620/-	0.590/-						
5.3		0.500/-	0.500/-	0.500/-			0.500/-	0.500/-	0.500/-		0.500/-	0.500/-	0.500/-	0.500/-	0.500/-	0.500/-	0.500/-			0.500/-	0.500/-	0.500/-		0.500/-	0.500/-	0.500/-	0.500/-						
5.5		(19800/-)(19400/-) (19500/-)	(18700/-)(18300/-) (18400/-)	(18700/-)(18300/-)(18400/-)			14300/-	14500/-	14500/-		(19800/-) (19400/-)	(19800/-) (19400/-)	(19800/-)(19400/-) (19500/-)	15000/-	(19800/-)(19400/-) (19500/-)	(18700/-)(18300/-) (18400/-)	(18700/-)(18300/-)(18400/-)			14300/-	14500/-	14500/-		(19800/-)(19400/-) (19500/-)	(19800/-)(19400/-) (19500/-)	(19800/-)(19400/-) (19500/-)	15000/-						
5.7		(35/-)(34/-)(34/-)	(33/-)(32/-)(32/-)	(33/-)(32/-)(32/-)			24/-	25/-	25/-		(35/-)(34/-)	(35/-)(34/-)	(35/-)(34/-)(34/-)	25/-	(30/-)(29/-)(29/-)	(28/-)(27/-)(27/-)	(28/-)(27/-)(27/-)			21/-	21/-	21/-		(30/-)(29/-)	(30/-)(29/-)	(30/-)(29/-)(29/-)	20/-						
7.1		YANMAR/4TNE98	GCT(NISSAN)/K25LPG	GCT(NISSAN)/K25			YANMAR/4TNE92	GCT(NISSAN)/K21LPG	GCT(NISSAN)/K21		CUMMINS/QSF2.8t3NA49	MTSUBISHI/S4S-Z362CSFL	YANMAR/4TNV94L-BXPHZ	ISUZU C240PK)-30	YANMAR/4TNE98	GCT(NISSAN)/K25LPG	GCT(NISSAN)/K25			YANMAR/4TNE92	GCT(NISSAN)/K21LPG	GCT(NISSAN)/K21		CUMMINS/QSF2.8t3NA49	MTSUBISHI/S4S-Z362CSFL	YANMAR/4TNV94L-BXPHZ	ISUZU C240PK)-30						
	StagellIIA/Tier3					StagellIIA/Tier3				StagellIIA	StagellIIA	StagellIIA	StagellIIA	StagellIIA/Tier3					StagellIIA/Tier3				StagellIIA	StagellIIA	StagellIIA	StagellIIA							
7.2	42.1	35	38			32.8	29	31.5		36.5	35.3	34.6	35.4	44.3	35	38			32.8	29	31.5		36.5	35.3	34.6	35.4							
7.3	2300	2400	2400			2450	2250	2300		2500	2250	2400	2500	2300	2400	2400			2450	2250	2300		2500	2250	2400	2500							
7.4	4/3319	4/2488	4/2488			4/2659	4/2065	4/2065		4/2800	4/3331	4/3054	4/2369	4/3319	4/2488	4/2488			4/2659	4/2065	4/2065		4/2800	4/3331	4/3054	4/2369							
7.10	12/90	12/60	12/60			12/90	12/60	12/60		12/90	12/90	12/90	12/90	12/90	12/90	12/60	12/60			12/90	12/60	12/60		12/90	12/90	12/90	12/90						
	186/1700	170/1600	185/1600			142/1600	140/1600	144/1600		186/1500	165/1700	191~208.5/1500	139.9/1800	196/1700	170/1600	185/1600			142/1600	140/1600	144/1600		186/1500	165/1700	191~208.5/1500	139.9/1800							
	98×110	89×100	89×100			92×100	89×83	89×83		94×100	94×120	94×110	86×102	98×110	89×100	89×100			92×100	89×83	89×83		94×100	94×120	94×110	86×102							
	HANGCHA/OKAMURA/MS					HANGCHA					HANGCHA/OKAMURA			HANGCHA/OKAMURA/MS		HANGCHA		HANGCHA/OKAMURA/MS					HANGCHA					HANGCHA/OKAMURA		HANGCHA/OKAMURA/MS		HANGCHA	
	Powershift														Powershift																		
	1/1														1/1																		
Addition data	10.1	175														175																	
	10.4	60	40	60	40	60	60	40	60	40	60	60	60	60	60	60	40	60	40	60	60	40	60	40	60	60	60	60					

XF series 3.0~3.5t forklift specification :

Distinguishing mark	1.1	Manufacturer	HANGCHA GROUP CO.,LTD.																							
	1.2	Manufacturer's type designation	CPCD30-XW33F/B/M	CPYD30-XW52F/B/M	CPQD30-XW22F/B/M	CPYD30-XW22F/B/M	CPQYD30-XW22F/B/M	CPCD30-XW43F/B	CPCD30-XW55F/B	CPCD30-XW56F/B/M	CPCD30-XW10F	CPCD35-XW33F/B/M	CPYD35-XW52F/B/M	CPQD35-XW22F/B/M	CPYD35-XW22F/B/M	CPQYD35-XW22F/B/M	CPCD35-XW43F/B	CPCD35-XW55F/B	CPCD35-XW56F/B/M							
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	Diesel	LPG	Gasoline	LPG	DUAL FUEL	Diesel	Diesel	Diesel	Diesel	Diesel	LPG	Gasoline	LPG	DUAL FUEL	Diesel	Diesel	Diesel							
	1.5	Rated capacity/rated load	Q (kg)										3500													
	1.6	Load centre distance	c (mm)										500													
	1.8	Load distance, centre of drive axle to fork	x (mm)										480													
Weight		Rear overhang	mm										615													
	1.9	Wheelbase	y (mm)										1700													
	2.1	Service Weight	kg										4705													
	2.2	Axle loading, laden front/rear	kg										7255/950													
	2.3	Axle loading, unladen front/rear	kg										1720/2985													
Tyres, chassis	3.2	Tyre size, front											28*9-15-12PR													
	3.3	Tyre size, rear											6.50-10-10PR													
	3.6	Tread, front	b1o (mm)										1005													
	3.7	Tread, rear	b1s (mm)										975													
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)										6/12													
	4.2	Height, mast lowered	h1 (mm)										2165													
	4.3	Free lift	h2 (mm)										145													
	4.4	Lift	h3 (mm)										3000													
	4.5	Height, mast extended	h4 (mm)										4145													
	4.7	Height of overhead guard (cabin)	h5 (mm)										2150(2230*)													
	4.20	Length to face of forks	l2 (mm)										2800													
	4.21	Overall width	b1 (mm)										1225													
	4.22	Fork dimensions	s/e/l (mm)										1070*122*45													
	4.31	Ground clearance, laden, below mast	m1 (mm)										130													
	4.32	Ground clearance, centre of wheelbase	m2 (mm)										165													
	4.35	Turning radius	W4 (mm)										2415													
		Min. right angle stacking aisle width (Add load length and clearance)	mm										2900													
	Performance data	5.1	Travel speed, laden/unladen	km/h	(-/17.2)(-/17.6) (-/17.6)	(-/17.9)(-/18.4) (-/18.3)	(-/17.9)(-/18.4)(-/18.3)				(-/17.2)(-/17.6) (-/17.6)	(-/17.2)(-/17.6)	(-/18.6)(-/19)	-/18.6	(-/17.2)(-/17.6) (-/17.6)	(-/17.9)(-/18.4) (-/18.3)	(-/17.9)(-/18.4)(-/18.3)				(-/17.2)(-/17.6)	(-/17.2)(-/17.6)	(-/18.6)(-/19)			
		5.2	Lift speed, laden/unladen	m/s	0.490/-	0.450/-	0.450/-				0.490/-	0.490/-	0.490/-	0.470/-	0.430/-	0.385/-	0.385/-				0.430/-	0.430/-	0.430/-			
5.3		Lowering speed, laden/unladen	m/s	0.500/-	0.500/-	0.500/-				0.500/-	0.500/-	0.500/-	0.500/-	0.500/-	0.500/-	0.500/-				0.500/-	0.500/-	0.500/-				
5.5		Drawbar pull, laden/unladen	N	(21000/-)(20500/-) (19900/-)	(19800/-)(19300/-) (18700/-)	(19800/-)(19300/-)(18700/-)				(21000/-) (20500/-)	(21000/-) (20500/-)	(20800/-)(20300/-) (19900/-)	16000/-	(21000/-)(20500/-) (19900/-)	(19800/-)(19300/-) (18700/-)	(19800/-)(19300/-)(18700/-)				(21000/-) (20500/-)	(21000/-) (19900/-)	(20800/-)(20300/-) (19900/-)				
5.7		Gradeability, laden/unladen*	%	(27/-)(26/-)(25/-)	(25/-)(24/-)(23/-)	(25/-)(24/-)(23/-)				(27/-)(26/-) (25000/-)	(26/-)(25/-)	(27/-)(26/-)(25/-)	19/-	(24/-)(23/-)(22/-)	(22/-)(22/-)(21/-)	(22/-)(22/-)(21/-)				(24/-)(23/-)	(23/-)(22/-)	(24/-)(23/-)(22/-)				
Combustion-engine	7.1	Engine manufacturer/type		YANMAR/4TNE98	GCT(NISSAN)/K25LPG	GCT(NISSAN)/K25				CUMMINS/ QSF2.813NA49	MITSUBISHI/ S4S-Z362CSFL	YANMAR/ 4TNV94L-BXPHZ	ISUZU C240PKJ-30	YANMAR/4TNE98	GCT(NISSAN)/K25LPG	GCT(NISSAN)/K25				CUMMINS/ QSF2.813NA49	MITSUBISHI/ S4S-Z362CSFL	YANMAR/ 4TNV94L-BXPHZ				
		Emission STD		StageIIIA/Tier3							StageIIIA	StageIIIA	StageIIIA/Tier3									StageIIIA				
	7.2	Engine power according to DIN ISO 1585	kw	44.3	35	38				36.5	35.3	34.6	35.4	44.3	35	38				36.5	35.3	34.6				
	7.3	Rated speed	min	2300	2400	2400				2500	2250	2400	2500	2300	2400	2400				2500	2250	2400				
	7.4	Number of cylinders/displacement	(-)/(cm ³)	4/3319	4/2488	4/2488				4/2800	4/3331	4/3054	4/2369	4/3319	4/2488	4/2488				4/2800	4/3331	4/3054				
	7.10	Battery voltage/nominal capacity	V/Ah	12/90	12/60	12/60				12/90	12/90	12/90	12/90	12/90	12/60	12/60				12/90	12/90	12/90				
		Rated torque	N·m/r/min	196/1700	170/1600	185/1600				186/1500	165/1700	191~208.5/1500	139.9/1800	196/1700	170/1600	185/1600				186/1500	165/1700	191~208.5/1500				
		Bore × stroke	mm	98×110	89×100	89×100				94×100	94×120	94×110	86×102	98×110	89×100	89×100				94×100	94×120	94×110				
		Transmissions Manufacturer		HANGCHA/OKAMURA/MS							HANGCHA/OKAMURA			HANGCHA/ OKAMURA/MS		HANGCHA		HANGCHA/OKAMURA/MS					HANGCHA/OKAMURA		HANGCHA/ OKAMURA/MS	
		Transmissions Type		Powershift																Powershift						
	Stage FWD/RVS		1/1																1/1							
Addition data	10.1	Operating pressure for attachments	bar	175																175						
	10.4	Fuel tank capacity	liter	40	70	40	70	70	70	70	70	40	70	40	70	70	70	70	70							

Note: *With suspension seat or cabin
* As a calculated value

