


# TOTAL WAREHOUSE

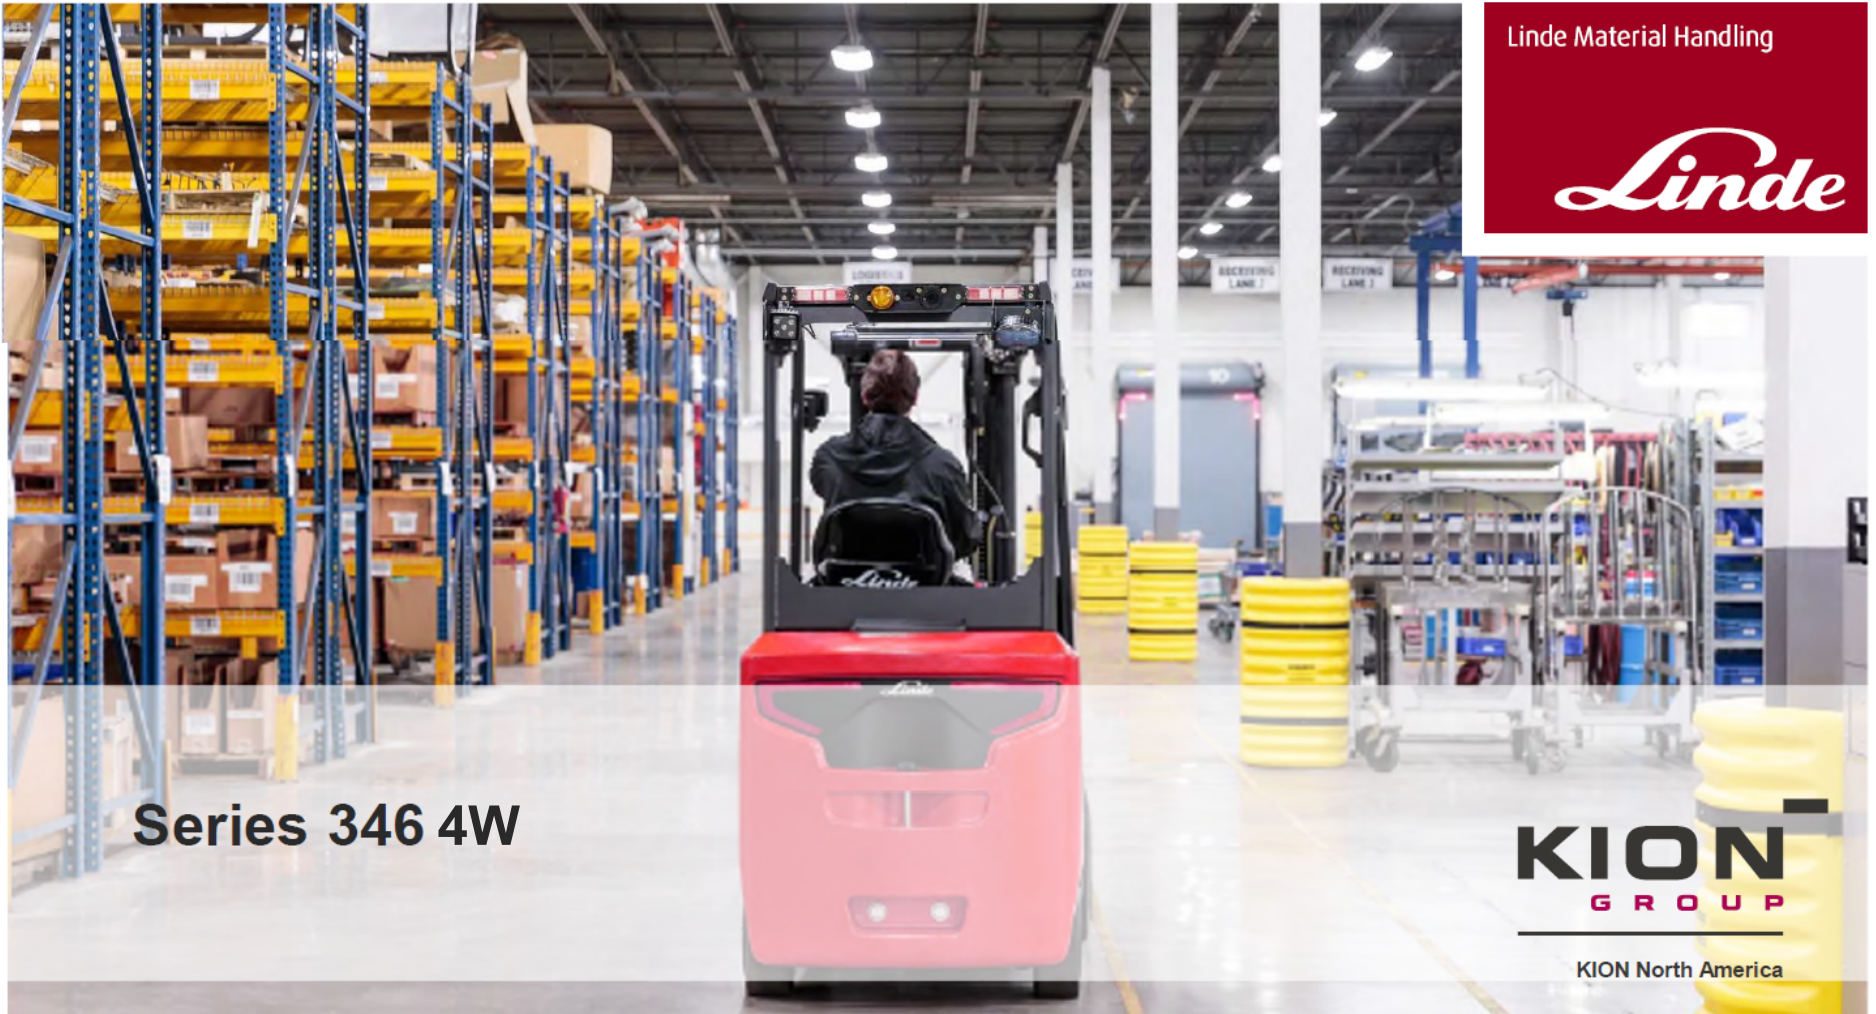

Linde Material Handling

*Linde*

Series 346 4W

**KION**  
GROUP

KION North America

## Series 346 4W

### 346 Basic dimensions



E20C / E20P: 86"

Standard: 80"  
Low: 78"



Width (all models):  
— 42" Cushion tires  
— 46" SE tires

## Series 346 4W

Available models (36-volt & 48-volt)

### Four-wheel configuration

Model	Capacity	Height	Length
<b>E20C</b>	4,000 lb	80"	86"
<b>E20P</b>	4,000 lb	80"	86"

Cushion



/C

SE



/P




## Series 346


### 346 Battery information (25" compartment)

#### Lift-out

#### 36-volt



#### 48-volt





#### Slide-out

Slide pad adds 0.25"

#### 36-volt



#### 48-volt




#### Roll-out

Rollers add 2.25"

#### 36-volt



#### 48-volt



\*AH capacity using standard, 6-hour rate



## Series 346 4W Operator compartment

### Features

- Small diameter steering wheel
- Large diameter cup holder
- Tool storage compartments
- Ergonomics for wide range of drivers
- Informational display unit



## Series 346 4W Operator compartment

- Driver comfort leads to high-productivity
- Full-suspension seat (standard)
- Adjustable armrest with fingertip controls
- Small diameter steering wheel
- **Low step height for easy entry/exit**



**Competition**  
Non-suspension  
Semi-suspension



## Series 346 4W Ergonomic features

- Adjustable steering column
- **Tilt-up armrest with fingertip controls**
- **Easy entry/exit on both sides**
  - Left-side PRIMARY
  - Right-side SECONDARY
- Adjustable, full-suspension seat





## Series 346 4W

### Linde exclusive: Combi-axle



Linde Material Handling

The classic Linde logo, consisting of the word "Linde" in a white, elegant script font on a dark red rectangular background.

- Provides the same turning behavior of three-wheel trucks
- High articulation point improves ride and stability
- Cushioned mounting block to the counterweight

