



LPG COUNTERBALANCED TRUCKS

CAPACITY: 5,000 – 6,500 lbs.

HT25CT - HT32CT

SERIES 1319

Safety

This line of trucks is designed for the demanding conditions of the Class 4 market. The low-mounted propane tank and dashboard, combined with a clearview mast (peripheral view) increase all-around visibility. This, together with low noise level and simple operation allow operators to stay alert and maintain unparalleled awareness of their surroundings.

Performance

With its impressive performance, the truck still maintains low fuel consumption and low exhaust emissions. Advanced engine technology combined with the durable drive line, enable the operator to use the truck's capability to maximize productivity. The ergonomic layout of all hydraulic functions allow for a high level of precision control and working performance.

Comfort

Climb on board relaxed, finish the shift relaxed. This truck is designed to the most advanced ergonomic standards. A spacious cab interior with accessibility from both sides of the truck, cowl-mounted hydraulic controls, suspension seat, and functional positioning of easy-actuation controls make for a low-stress working environment.

Reliability/Durability

This machine withstands the most brutal conditions in severe applications thanks to our time-tested engineering, design and manufacturing expertise. Its massive components are designed to operate in adverse conditions and can handle intense utilization with minimum care.


Productivity

The use of high-quality parts and assemblies allow extended maintenance intervals. At 500 hours, this is among the best in the industry. Confidence in the quality of the machine also allows us to offer an unmatched, standard 2-year or 4000-hour warranty.

TECHNICAL DATA

June 2017 / Series 1319

Characteristics	1.1	Manufacturer		LINDE		LINDE		LINDE		LINDE	
	1.2	Model designation		HT25 CT		HT27 CT		HT30 CT		HT32 CT	
	1.3	Power unit		LPG		LPG		LPG		LPG	
	1.4	Operation		Seated		Seated		Seated		Seated	
	1.5	Load capacity	Q	5000 lbs	2273 kg	5500 lbs	2500 kg	6000 lbs	2727 kg	6500 lbs	2955 kg
	1.6	Load center	c	24 in	600 mm	24 in	600 mm	24 in	600 mm	24 in	600 mm
	1.8	Axle center to fork face	x	16.6 in	423 mm	16.6 in	423 mm	16.9 in	428 mm	16.9 in	428 mm
	1.9	Wheelbase	y	59.1 in	1500 mm	59.1 in	1500 mm	59.1 in	1500 mm	59.1 in	1500 mm
Weights	2.1	Service weight		9215 lbs	4180 kg	9523 lbs	4320 kg	10097 lbs	4580 kg	10207 lbs	4630 kg
	2.2.1	Axle load with load, front		12323 lbs	5590 kg	13040 lbs	5915 kg	14014 lbs	6357 kg	14594 lbs	6620 kg
	2.2.2	Axle load with load, rear		1902 lbs	863 kg	1984 lbs	900 kg	2094 lbs	950 kg	2127 lbs	965 kg
	2.3.1	Axle load without load, front		3747 lbs	1700 kg	3703 lbs	1680 kg	3703 lbs	1680 kg	3637 lbs	1650 kg
	2.3.2	Axle load without load, rear		5467 lbs	2480 kg	5820 lbs	2640 kg	6393 lbs	2900 kg	6569 lbs	2980 kg
Wheels/Tires	3.1	Tire: SE=(superelastic), P=(pneumatic), C=(cushion)		C		C		C		C	
	3.2	Tire size, front		21x7x15		21x8x15		21x8x15		21x8x15	
	3.3	Tire size, rear		16x6x10.5		16x6x10.5		16x6x10.5		16x6x10.5	
	3.5	Wheels, number front/rear (x=drive)		2x/2		2x/2		2x/2		2x/2	
	3.6	Track width, front	b10	34.7 in	882 mm	35.7 in	908 mm	35.7 in	908 mm	35.7 in	908 mm
	3.7	Track width, rear	b11	35.8 in	910 mm	35.8 in	910 mm	35.8 in	910 mm	35.8 in	910 mm
Dimensions	4.1	Mast tilt, forward/backward		6°/8°		6°/8°		6°/8°		6°/8°	
	4.2	Height of mast, lowered	h1	see chart & price pages		see chart & price pages		see chart & price pages		see chart & price pages	
	4.3	Free lift	h5	see chart & price pages		see chart & price pages		see chart & price pages		see chart & price pages	
	4.4	Lift	h3	see chart & price pages		see chart & price pages		see chart & price pages		see chart & price pages	
	4.5	Height of mast, extended	h4	see chart & price pages		see chart & price pages		see chart & price pages		see chart & price pages	
	4.7	Height of overhead guard (cabin)	h6	83.9 in	2130 mm	83.9 in	2130 mm	83.9 in	2130 mm	83.9 in	2130 mm
	4.8	Height of operator seat	h7	41.2 in	1046 mm	41.2 in	1046 mm	41.2 in	1046 mm	41.2 in	1046 mm
	4.12	Tow coupling height	h10	22.1 in	560 mm	22.1 in	560 mm	22.1 in	560 mm	22.1 in	560 mm
	4.19	Overall length	l1	133.9 in	3401 mm	135.3 in	3437 mm	137.1 in	3483 mm	138.1 in	3506 mm
	4.20	Length to fork face	l2	91.9 in	2334 mm	93.3 in	2370 mm	95.1 in	2416 mm	96.0 in	2439 mm
	4.21	Overall width	b1/b2	41.8 in	1061 mm	43.7 in	1110 mm	43.7 in	1110 mm	43.7 in	1110 mm
	4.22	Fork dimensions	SxExL	1.5 x 4 x 48 in		1.5 x 4 x 48 in		1.75 x 5 x 48 in		1.75 x 5 x 48 in	
	4.24	Width of fork carriage	b3	38.6 in	980 mm	38.6 in	980 mm	38.6 in	980 mm	38.6 in	980 mm
	4.31	Ground clearance with load, mast	m1	3.86 in	98 mm	3.86 in	98 mm	3.86 in	98 mm	3.86 in	98 mm
	4.32	Ground clearance with load, center of wheelbase	m2	4.4 in	110 mm	4.4 in	110 mm	4.4 in	110 mm	4.4 in	110 mm
	4.33	Aisle width, 48" (1220mm) load & 8" (200mm) clearance	Ast	154.3 in	3920 mm	156.7 in	3980 mm	157.1 in	3990 mm	159.5 in	4050 mm
	4.34	Aisle width, add load & operational clearance	Ast	98.4 in	2500 mm	100.6 in	2555 mm	101.0 in	2565 mm	103.5 in	2630 mm
Performance	4.35	Turning radius	Wa	81.7 in	2076 mm	83.9 in	2130 mm	84.1 in	2136 mm	86.6 in	2200 mm
	4.36	Inside Turning Radius	b13	21.9 in	556 mm	21.9 in	556 mm	21.9 in	556 mm	21.9 in	556 mm
	5.1.1	Travel speed, with load		11.25 mph	18 kmh	11.25 mph	18 kmh	11.25 mph	18 kmh	11.25 mph	18 kmh
	5.1.2	Travel speed, without load		11.25 mph	18 kmh	11.25 mph	18 kmh	11.25 mph	18 kmh	11.25 mph	18 kmh
	5.2.1	Lifting speed, with load		114 fpm	0.58 m/s	114 fpm	0.58 m/s	110 fpm	0.56 m/s	110 fpm	0.56 m/s
	5.2.2	Lifting speed, without load		118 fpm	0.6 m/s	118 fpm	0.6 m/s	118 fm	0.6 m/s	118 fpm	0.6 m/s
	5.3.1	Lowering speed, with load		90 fpm	0.46 m/s	94 fpm	0.48 m/s	94 fpm	0.48 m/s	94 fpm	0.48 m/s
	5.3.2	Lowering speed, without load		67 fpm	0.34 m/s	67 fpm	0.34 m/s	78 fpm	0.4 m/s	78 fpm	0.4 m/s
	5.5.1	Tractive force, with load		3596 lbf	16000 N	3507 lbf	15600 N	3304 lbf	14700 N	3686 lbf	16400 N
	5.5.2	Tractive force, without load		2180 lbf	9700 N	2877 lbf	12800 N	2472 lbf	11000 N	2472 lbf	11000 N
	5.7.1	Climbing ability, with load		26.2 %		24 %		21 %		22.6 %	
	5.7.2	Climbing ability, without load		24.4 %		31.6 %		25.3 %		25 %	
Drive	5.9.1	Acceleration time, with load		4.8 s		4.8 s		5.6 s		5.7 s	
	5.9.2	Acceleration time, without load		4.3 s		4.5 s		4.8 s		4.9 s	
	5.10	Service brake		Mechanical/hydraulic		Mechanical/hydraulic		Mechanical/hydraulic		Mechanical/hydraulic	
	7.1	Engine manufacturer/type		IMPCO/2.5L iVCT		IMPCO/2.5L iVCT		IMPCO/2.5L iVCT		IMPCO/2.5L iVCT	
Other	7.2	Engine rated power according to ISO 1585		47 kw		47 kw		47 kw		47 kw	
	7.3	Rated speed		800/3000 rpm		800/3000 rpm		800/3000 rpm		800/3000 rpm	
	7.4	Number of cylinders/displacement		4/152.6 cu3	4/2500 cc	4/152.6 cu3	4/2500 cc	4/152.6 cu3	4/2500 cc	4/152.6 cu3	4/2500 cc
	8.1	Type of drive control		Torque Converter		Torque Converter		Torque Converter		Torque Converter	
Other	8.2	Working pressure for attachments		2600 psi	180 bar	2600 psi	180 bar	2600 psi	180 bar	2600 psi	180 bar
	8.3	Hydraulic oil flow		18 gpm	70 l/min	18 gpm	70 l/min	18 gpm	70 l/min	18 gpm	70 l/min
	8.4	Noise level		80 dB (A)		80 dB (A)		80 dB (A)		80 dB (A)	

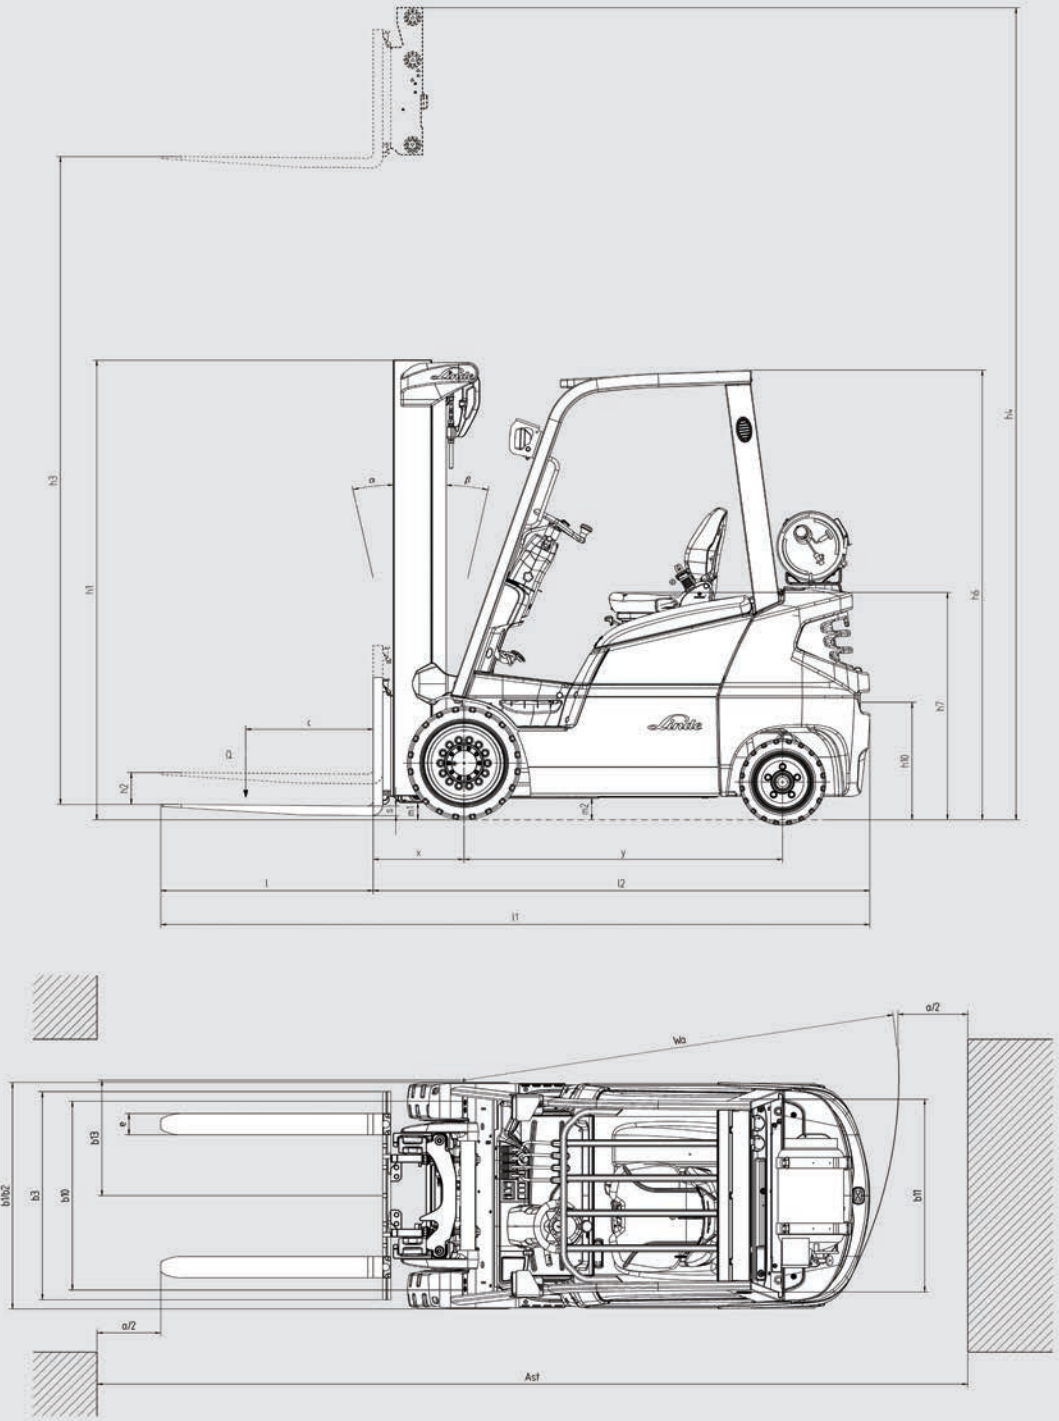

FEATURES


Linde Torque Converter Truck

- > Robust
- > Responsive
- > Low maintenance



Rugged Drive Line

- > Massive differential
- > High-torque transmission
- > Wet disc brakes

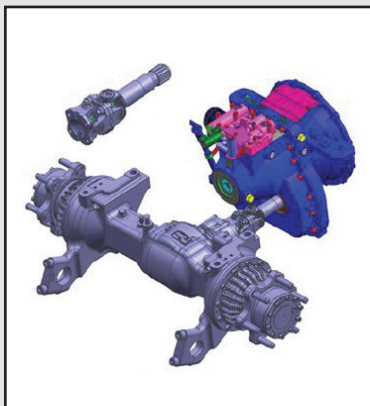


Linde Clearview Mast

- > Best peripheral view
- > Least obstructive hose routing
- > Bulkhead hose connection



Engine

- > 500-hour maintenance interval
- > Fuel injected
- > 2.5 liter, high-torque engine

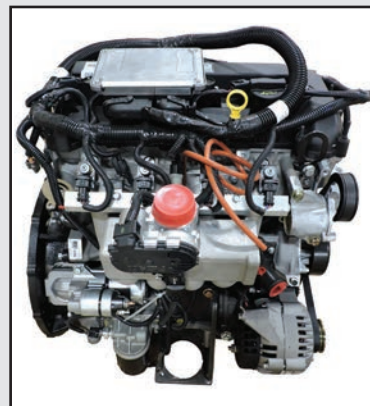

Truck Control

- > Two pedal system, inching & brake
- > Foot operated parking brake
- > Exceptionally responsive steering

Linde Hydraulic System

- > Cowl-mounted hydraulic handles
- > Short linkage, precise control
- > High oil volume

Linde Operator Compartment

- > Generous leg room
- > On/Off both sides
- > Best all-around view

For more information on Linde material handling equipment, please contact:

TOTAL
WAREHOUSE
TotalWarehouse.com
833-868-2500