

Standard Equipment/Optional Equipment

Standard Equipment

General	Safety
Three-wheel configuration	Monitoring system stops truck in the event of traction, steering or lift failure
Overall width (reach legs) 1270mm	Dual channel fail-to-safe circuitry
Linde Load Control for lift/lower, reach, tilt and side shift	Emergency circuit isolator
Linde Digital Control system (LDC) incorporating CAN bus technology	Three independent braking systems
Linde twin accelerator pedals	Seat-actuated traction interlock
Full suspension fabric seat with electric lumbar support and adjustable armrests	Electric horn
Comprehensive head-up digital instrument display	Automatic slowdown at maximum lift
6.5 kW maintenance-free AC drive & 14 kW AC lift motor	Reach travel soft stop
Polyurethane drive and load wheel tyres	Protective glass screen between operator and mast
Self-adjusting service brakes	Battery locking interlock
Linde proportional 180° electric steering	Electrical and hydraulic overload protection
Fork length 1150mm	Overhead guard
Lift height indicator/Soft stop lowering	Automatic creep speed above 8500mm lift
Batteries and chargers	Mast
48 V, 480 Ah to 1000 Ah depending on model and application	Torsion-resistant fixed triplex panoramic mast
Wide selection of chargers available to suit application	Integral side shift
	High residual capacities

Optional Equipment

Panoramic fixed mast lifts to 9455mm (R14X/R14X high), 9955mm (R16X), 11455mm (R17X, R17X HD)	Seat backrest extension
360° steering (single accelerator pedal only)	10° Rotating seat (R17X, R17X HD)
Single accelerator pedal, automotive layout	Vertical adjustment armrests
Alternative fork lengths	Heated super-comfort seat
Fork extensions	Seat interlock alarm
Load backrest	Cold store protection to minus 30°C
Single axis joysticks for lift, reach, tilt and additional functions	Mesh or polycarbonate protection on overhead guard
Manual fork tilt	Mast mounted CCTV camera system
Horizontal fork leveling	Linde Connected Solutions (connect:)
Side shift centering	PIN access
Additional hydraulic circuit	Blue Spot™
Height pre-selector	Working lamps/beacons
High vision glass roof for standard overhead guard and increased height overhead guard (plus 175mm)	Audible traction alarm
Increased height overhead guard (plus 175mm)	Mounting bracket for terminals
PVC seat	Alternative colour schemes
	Other options available on request



Electric Reach Trucks
Capacity 1400 kg - 1700 kg
R 14 X, R 16 X, R 17 X
Series 116-03



Safety

The revolutionary Linde X range of reach trucks sets new industry standards for comfort and performance combined with outstanding safety in narrow aisle storage and retrieval applications.

Performance

The Linde drive and lift system employing advanced control technology translates the powerful output of the AC motors into seamless productivity. A comprehensive selection of DIN batteries ensures each truck is precisely matched to the demands of individual applications.

Comfort

A perfect interface between operator and truck is assured with the Linde X range concept, which has doubled the space in the cab. The comfort-class seat with lumbar support, incorporates the compact steering wheel and all hydraulic controls integrated into adjustable armrests. Unrestricted comfort and a truly intuitive control layout provides the perfect working environment for optimum performance.

Features

Superb working environment

- Linde Load Control: precise, effortless fingertip control of all mast movements
- Ergonomic full suspension, comfort class seat fully adjustable to suit the operator’s personal preference including two adjustable armrests
- The compact electric steering wheel is integrated in the left armrest
- Fingertip joystick controls for all mast functions are integrated in the right armrest



Stability


- Robot-welded chassis, designed and built for maximum strength and operational stability
- The fixed, panoramic mast has high resistance to torsional stresses for safe and exceptionally stable load handling
- Heavy duty materials provide a low centre of gravity for impressive stability and high residual capacities

Manoeuvrability

- The compact, short wheelbase chassis combines with a small diameter steering wheel and effortless electric steering for impressive manoeuvrability in narrow aisles
- Faster and safer work cycles for higher productivity

Unique ultra-wide mast design

- Panoramic view of the load and storage zones
- The mast is fixed to the chassis while a traversing head provides the reach movement
- Integrated side shift is standard
- Unique Booster - cylinder for reduced mast deflection

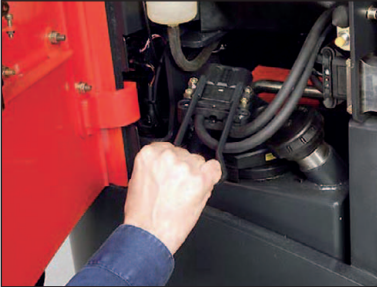

Precision

- Seamless travelling and pinpoint manoeuvring with Linde twin accelerator pedals
- Precision load handling with Linde Load Control
- Responsive and adjustable electric steering with essential ‘road feel’
- Digital head-up instrument display for instant read out of truck status
- Excellent visibility of load and surrounding environment

Battery


- Batteries uniquely located under operator’s compartment
- Capacities to suit every type of application: 480 - 1000 Ah (heavy duty)
- Battery easily changed/checked using pallet truck or hoist attachment

Servicing

- Maintenance-free AC traction and lift motors
- Configurable Linde Digital Control
- Incorporates diagnostic technology
- Easy service access
- Up to 1000 operating hours between services

Technical Data according to VDI 2198

Characteristics	1.1	Manufacturer		LINDE	LINDE	LINDE	LINDE	LINDE
	1.2	Manufacturer's type designation		R14X	R14X High	R16X	R17X	R17X HD
	1.2a	Series		116-03	116-03	116-03	116-03	116-03
	1.3	Power unit		Battery	Battery	Battery	Battery	Battery
	1.4	Operation		Seat	Seat	Seat	Seat	Seat
	1.5	Load capacity/Load	Q (t)	1.4 ¹⁾	1.4 ¹⁾	1.6 ¹⁾	1.7 ¹⁾	1.7 ¹⁾
	1.6	Load centre distance	c (mm)	600 / 500	600 / 500	600 / 500	600 / 500	600 / 500
	1.8	Axle centre to fork face	x (mm)	46	46	41	41	41
	1.9	Wheelbase	y (mm)	1130	1130	1130	1346	1346
Weights	2.1	Service weight	(kg)	3620 ²⁾	3770 ²⁾	4170 ²⁾	4960 ²⁾	5080 ²⁾
	2.3	Axle load without load, front/rear	(kg)	1960 / 1660 ²⁾	1960 / 1810 ²⁾	1992 / 2178 ²⁾	1852 / 3108 ²⁾	2121 / 2959 ²⁾
	2.4	Axle load, fork outreached, with load, front/rear	(kg)	910 / 4110	906 / 4264	860 / 4910	896 / 5764	1180 / 5600
	2.5	Axle load, fork retracted, with load, front/rear	(kg)	1150 / 3870	1117 / 4053	1162 / 4608	1375 / 5285	1415 / 5365
Wheels/Tyres	3.1	Tyres rubber, SE, pneumatic, polyurethane		Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane
	3.2	Tyre size, front		Ø 343 x 135	Ø 343 x 135	Ø 343 x 135	Ø 343 x 135	Ø 343 x 135
	3.3	Tyre size, rear		Ø 230 x 140	Ø 230 x 140	Ø 230 x 140	Ø 230 x 140	Ø 230 x 140
	3.5	Wheels, number front/rear (x = driven)		1x / 2	1x / 2	1x / 2	1x / 2	1x / 2
Dimensions	3.7	Track width, rear		1072	1072	1072	1072	1072
	4.1	Mast/fork carriage tilt, forward/backward	a/b (°)	0.0 / 2.5 (2.0 / 2.5) ³⁾	0.0 / 2.5 (2.0 / 2.5) ³⁾	0.0 / 2.5 (2.0 / 2.5) ³⁾	0.0 / 2.5 (2.0 / 2.5) ³⁾	0.0 / 2.5 (2.0 / 2.5) ³⁾
	4.2	Height of mast, lowered	h1 (mm)	2455	2955	3455	3230	4605
	4.3	Free lift	h2 (mm)	1541	2041	2541	2316	3691
	4.4	Lift	h3 (mm)	5655	6955	7555	7855	10655
	4.5	Height of mast, extended	h4 (mm)	6614	7914	8514	8814	11614
	4.7	Height of overhead guard (cabin)	h6 (mm)	2190 [2365] ⁴⁾	2355 [2530] ⁴⁾	2355 [2530] ⁴⁾	2190 [2365] ⁴⁾	2355 [2530/2410] ³⁾
	4.8	Height of seat/stand on platform	h7 (mm)	970 / 1130	1135 / 1295	1135 / 1295	970 / 1130	1135 / 1295
	4.10	Height of reach legs	h8 (mm)	245	245	245	245	245
	4.19	Overall length	l1 (mm)	2444	2444	2444	2660	2660
	4.20	Length to fork face	l2 (mm)	1294	1294	1294	1510	1510
	4.21	Overall width	b1/b2 (mm)	1270 / 1270	1270 / 1270	1270 / 1270	1270 / 1270	1270 / 1270
	4.22	Fork dimensions DIN ISO 2331	s/e/l (mm)	40 x 80 x 1150	40 x 80 x 1150	45 x 100 x 1150	45 x 100 x 1150	45 x 100 x 1150
	4.23	Fork carriage to ISO 2328, class/type A, B		2A	2A	2A	2A	2A
	4.24	Width of fork carriage	b3 (mm)	710	710	710	710	710
	4.25	Fork spread	b5 (mm)	296 / 690	296 / 690	316 / 710	316 / 710	316 / 710
	4.26	Distance between wheel arms/loading surfaces	b4 (mm)	930	930	930	930	930
	4.28	Reach travel	l4 (mm)	170	170	170	170	170
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	70	70	70	70	70
	Performance	4.34.1	Aisle width for pallets 1000 × 1200 crossways	As1 (mm)	2662 ⁴⁾	2662 ⁴⁾	2666 ⁴⁾	2882 ⁴⁾
4.34.2		Aisle width with pallet 800 x 1200 along forks	As1 (mm)	2756 ⁴⁾	2756 ⁴⁾	2761 ⁴⁾	2977 ⁴⁾	2977 ⁴⁾
4.35		Turning radius	Wa (mm)	1335	1335	1335	1551	1551 [-/1611] ³⁾
4.37		Length of chassis	l7 (mm)	1451	1451	1451	1667	1667
5.1		Travel speed, with/without load	(km/h)	14 / 14 ²⁾ ⁷⁾	14 / 14 ²⁾ ⁷⁾	14 / 14 ²⁾ ⁷⁾	14 / 14 ²⁾ ⁷⁾	14 / 14 ²⁾ ⁷⁾
5.2		Lifting speed, with/without load	(m/s)	0.44 / 0.7 ²⁾ ⁷⁾	0.41 / 0.7 ²⁾ ⁷⁾	0.41 / 0.7 ²⁾ ⁷⁾	0.4 / 0.7 ²⁾ ⁷⁾	0.4 / 0.7 ²⁾ ⁷⁾
5.3		Lowering speed, with/without load	(m/s)	0.55 / 0.45 ²⁾	0.55 / 0.45 ²⁾	0.55 / 0.45 ²⁾	0.55 / 0.45 ²⁾	0.55 / 0.45 ²⁾
5.4		Reach speed, with/without load	(m/s)	0.1 / 0.105 ²⁾	0.1 / 0.105 ²⁾	0.1 / 0.105 ²⁾	0.1 / 0.105 ²⁾	0.1 / 0.105 ²⁾
5.7		Climbing ability, with/without load	(%)	3.9 / 7.1	3.9 / 7.1	3.9 / 7.1	3.9 / 7.1	3.9 / 7.1
5.8		Maximum climbing ability, with/without load	(%)	10.0 / 10.0	10.0 / 10.0	10.0 / 10.0	10.0 / 10.0	10.0 / 10.0
Drive	5.9	Acceleration time, with/without load	(s)	5.8 / 5.0 ⁷⁾	5.8 / 5.0 ⁷⁾	5.8 / 5.0 ⁷⁾	5.8 / 5.0 ⁷⁾	5.8 / 5.0 ⁷⁾
	5.10	Service brake		Electric/hydraulic	Electric/hydraulic	Electric/hydraulic	Electric/hydraulic	Electric/hydraulic
	6.1	Drive motor rating S2 60 min	(kW)	6.5	6.5	6.5	6.5	6.5
	6.2	Lift motor rating at S3 15%	(kW)	14	14	14	14	14
	6.3	Battery according to DIN 43531/35/36 A,B,C,no		43 531 / A	43 531 / A	43 531 / A	43 531 / A	43 531 / A
	6.4	Battery voltage/rated capacity (5h)	(V)/(Ah)	48 / 480	48 / 690/750	48 / 690/750	48 / 640	48 / 920/1000
	6.5	Battery weight (± 5%)	(kg)	720	1013	1013	946	1315
Others	6.6	Power consumption according to VDI cycle	(kWh/h)	upon request	upon request	upon request	upon request	upon request
	8.1	Type of drive unit		Electronic/stepless	Electronic/stepless	Electronic/stepless	Electronic/stepless	Electronic/stepless
	10.1	Operating pressure for attachments	(bar)	180 ⁸⁾	180 ⁸⁾	180 ⁸⁾	180 ⁸⁾	180 ⁸⁾
	10.2	Oil flow for attachments	(l/min)	25 ⁹⁾	25 ⁹⁾	25 ⁹⁾	25 ⁹⁾	25 ⁹⁾
	10.7	Sound pressure level LpAz (at the driver's seat)	(dB(A))	upon request	upon request	upon request	upon request	upon request

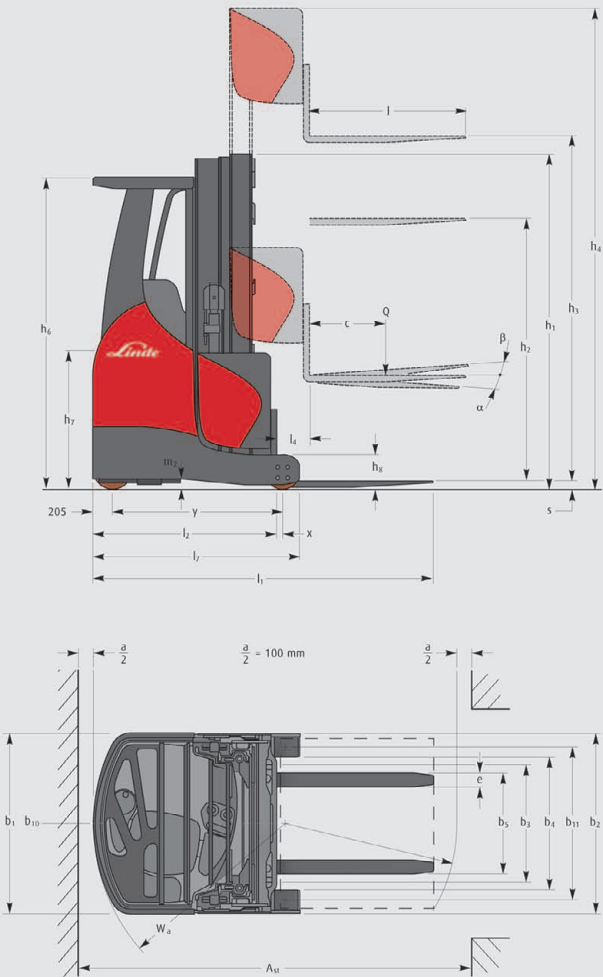

Triplex masts									
Lift	h3	5155	5655	6355	6455	6555	6655	6955	7055
Height of mast, lowered	h1	2455	2455	2955	2955	2955	2955	2955	2955
Height of mast, extended	h4	6114	6614	7314	7414	7514	7614	7914	8014
Free lift	h2	1541	1541	2041	2041	2041	2041	2041	2041
Lift	h3	7555	7855	7955	8255	8455	8555	9055	9155
Height of mast, lowered	h1	3455	3455	3455	3455	3455	3955	3955	3955
Height of mast, extended	h4	8514	8814	8914	9214	9414	9514	10014	10114
Free lift	h2	2541	2541	2541	2541	2541	3041	3041	3041
Lift	h3	9255	9455	9655	9755	10655	11155	11355	11455
Height of mast, lowered	h1	3955	3955	4455	4455	4930	4930	4930	4930
Height of mast, extended	h4	10214	10414	10614	10714	11614	12114	12314	12414
Free lift	h2	3041	3041	3541	3541	4016	4016	4016	4016
Alternative lift heights available on request. Lift height = h3 + s									
Maximum lifts:									
R14X = 9455 mm									
R16X = 9955 mm									
R17X/R17X HD = 11455 mm									