

## COMBi-CB

The innovative and compact Combi-CB is designed to increase productivity, improve safety and help increase your storage capacity both indoors & outdoors.

# COMBiLiFT

LIFTING INNOVATION

**TOTAL**  
WAREHOUSE


www.totalwarehouse.com  
833-868-2500





[combilift.com](http://combilift.com)

# COMBi-CB

## FRONTAL MODE

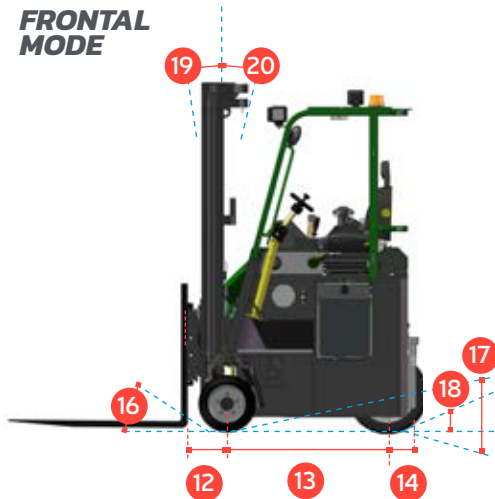

## SiDEWARD MODE

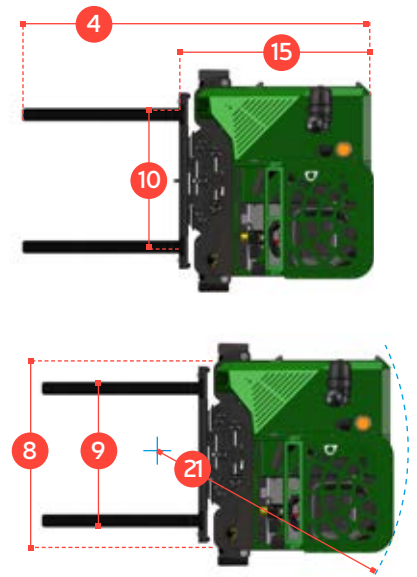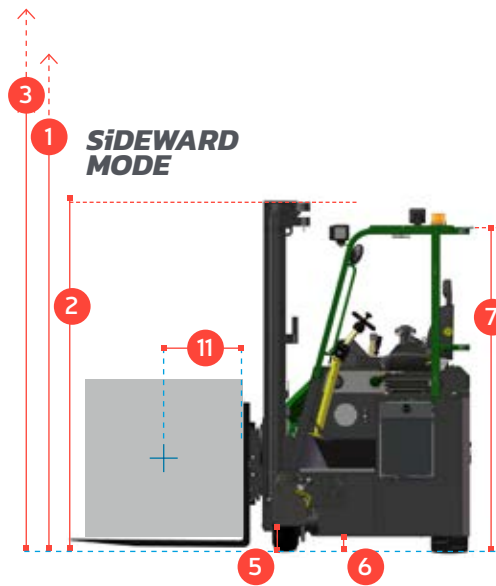

| REF. | DESCRIPTION                          | CB5  |      | CB6      |      |
|------|--------------------------------------|------|------|----------|------|
|      |                                      | Std. |      | Optional |      |
| 1 a  | Standard. Lift Height                | 157" | 193" | 216"     | 236" |
| 1 b  | Free Lift Height                     | 0"   | 52"  | 60"      | 67"  |
| 2    | Height Mast Closed                   | 105" | 88"  | 96"      | 103" |
| 3    | Max. (Mast raised)                   | 190" | 228" | 251"     | 270" |
| 4    | Overall Length                       | 103" |      |          |      |
| 5    | Ground Clearance Under Mast          | 5"   |      |          |      |
| 6    | Ground Clearance to Wheelbase Center | 4"   |      |          |      |
| 7    | Height of Overhead Guard             | 88½" |      |          |      |
| 8    | Width                                | 59"  |      |          |      |
| 9    | Outside Spread of Fork Arms          | 52½" |      |          |      |
| 10   | Track Front                          | 52"  |      |          |      |
| 11   | Load Center Distance                 | 24"  |      |          |      |
| 12   | Overhang Front                       | 12½" |      |          |      |
| 13   | Wheel Base                           | 43½" |      |          |      |
| 14   | Overhang Back                        | 5½"  |      |          |      |
| 15   | Length From Face of Fork             | 61"  |      |          |      |
| 16   | Approach Angle                       | 30°  |      |          |      |
| 17   | Ramp Angle                           | 15°  |      |          |      |
| 18   | Departure Angle                      | 30°  |      |          |      |
| 19   | Forward Tilt                         | 3°   |      |          |      |
| 20   | Backward Tilt                        | 6°   |      |          |      |
| 21   | Minimum Outside Radius               | 55"  |      |          |      |

|   |                              |                    |            |
|---|------------------------------|--------------------|------------|
| A | Capacity                     | 5,000 lbs          | 6,000 lbs  |
| B | Unladen Weight               | 12,000 lbs         | 12,900 lbs |
| C | Maximum Ground Speed         | 9 mph              |            |
| D | Gradeability                 | 10%                |            |
| E | 3 ltr GM LPG                 | 65 HP              |            |
| F | Electrics                    | 12 Volt            |            |
| G | Fork Section                 | 5" x 2" x 42"      |            |
| H | 16 x 7 – 10.5 Front Tire x 2 | OD 16" / Width 7"  |            |
| I | 22 x 10 x 16 Rear Tire x 1   | OD 22" / Width 10" |            |
| J | Standard Color               | Green and Gray     |            |
| K | Suspension Seat              | Grammer MSG 65     |            |

rev. 2.1

## Multi-Directional



### Features Include:

- Open Cabin
- Multi-Direction Operation
- Load Sensing Steering
- 3 Wheel Hydrostatic Drive
- +/- 4" Sideshift
- 4-way lever positioning of Wheels

### Distributed by:

Protected by Design Registration Copyright: European Community No.: 000725668-0001; US No.: D579,624; Canadian No.: 123292 | Australian No.: 318370; Russian Federation No.: 70814 | Korean No.: 30-0516087; Japanese No.: 1330896; Taiwan No.: D126056; Chinese No.: ZL200730329732.6

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

**TOTAL**  
WAREHOUSE

www.totalwarehouse.com  
833-868-2500